







## Quick Start Guide – Radio Operation - for the G1000

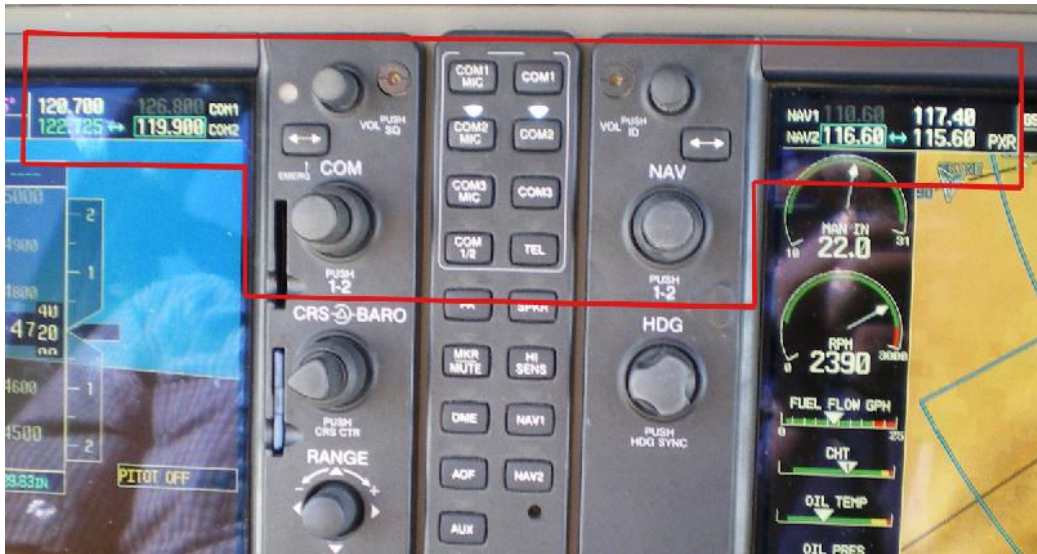

Everything you need is inside the red “T” box for operating the Nav/Coms.

- COM1 and NAV1 are on the top row of both the PFD and the MFD and repeated on both sides. COM2 and NAV2 are on the bottom row
- The standby frequencies for both are in the blue Tuning Box  and are set using the concentric tuning control . The outer knob is for whole digits and the inner for decimals. 
- Switch the Tuning Box from COM1/COM2 or NAV1/NAV2 by pressing the inner knob on the corresponding COM or NAV tuning control.
- Toggle frequencies from the Tuning Box to Active and Active to Tuning Box by pressing the  key. There is a NAV toggle and a COM toggle.
- Select the COM Transmit/Receive by pressing  for COM1/COM2 as desired. Note that the selected frequency COM will display GREEN and the LED above the button will be illuminated.
- You can listen to another COM by pressing the  button.

Also notice that the VOR Morse ID code is decodes and displayed. When a radio is receiving a signal RX will display and when the radio is transmitting a TX will display. That’s the basics.